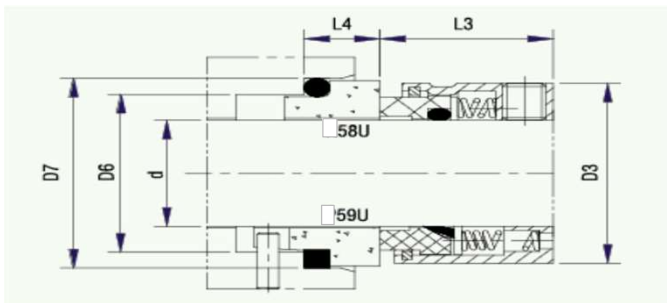


TD-58U**Operation**

Temperature	: -40°C - 200°C
Pressure	: 15 bar Linear
Velocity	: 20 m/S
Pumps	: Petroleum, acids, chemical

Materials

Rotary Ring	: Carbon / Sic / TC
Stationary Ring	: Ceramic / Sic / TC
Secondary Seals	: NBR / EPDM / VITON
Spring and Metal	: SS304 / SS316
Size	: 14 mm - 100 mm.

**TD-58U,TD-59U**

SIZE/METRIC	D3	D6	D7	L3	L4
D					
14	24	21	25	23.0	12.0
16	26	23	27	23.0	12.0
18	32	27	33	24.0	11.7
20	34	29	35	24.0	11.7
22	36	31	37	24.0	11.7
24	38	33	39	26.7	13.3
25	39	34	40	27.0	13.0
28	42	37	43	30.0	12.5
30	44	39	45	30.5	12.0
32	46	42	48	30.5	12.0
33	47	42	48	30.5	12.0
35	49	44	50	30.5	12.0
38	54	49	56	32.0	13.0
40	56	51	58	32.0	13.0
43	59	54	61	32.0	13.0
45	61	56	63	32.0	13.0
48	64	59	66	32.0	13.0
50	66	62	70	34.0	13.5
53	69	65	73	34.0	13.5
55	71	67	75	34.0	13.5
58	78	70	78	39.0	13.5
60	80	72	80	39.0	13.5
63	83	75	83	39.0	13.5
65	85	77	85	39.0	13.5
68	88	81	90	39.0	13.5
70	90	83	92	45.5	14.5
75	95	88	97	45.5	14.5
80	104	95	105	45.0	15.0
85	109	100	110	45.0	15.0
90	114	105	115	50.0	15.0
95	119	110	120	50.0	15.0
100	124	115	125	50.0	15.0

TENDEN

Mechanical Seal

TD-59U**Operation**

Temperature	: -40 °C - 200 °C
Pressure	: 15 bar Linear
Velocity	: 20 m/S
Pumps	: Petroleum, acids, chemical

Materials

Rotary Ring	: Carbon / Sic /TC
Stationary Ring	: Ceramic / Sic / TC
Secondary Seals	: MBR / EPDM / VITON / PTFE
Spring and Metal	: SS304/SS316
Size	: 14 mm - 100mm.

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279
Mobile : 095-249-3598
Fax : 02-014-0754