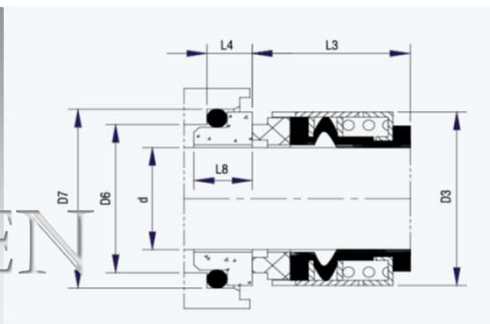


TD-502

TENDEN
Mechanical Seal

Operation

Temperature : -30 °C- 200 °C
Pressure : 16 bar
Velocity : 12m/S
Medium : water,oli,weak corrosive

Materials

Rotary Ring : Carbon / Sic / TC
Stationary Ring : Ceramic / Sic / TC
Secondary Seals : NBT/EPDM/VION
Spring and Metal : SS304/SS316
Size : 14 mm - 80 mm.

TD-502

SIZE/METRIC	D3	D6	D7	L3	L4	L8
D						
14	24.0	21.0	25.0	23.0	12.0	12.8
16	26.0	23.0	27.0	23.0	12.0	12.8
18	32.0	27.0	33.0	24.0	13.5	14.5
20	34.0	29.0	35.0	24.0	13.5	14.5
22	36.0	31.0	37.0	24.0	13.5	14.5
24	38.0	33.0	39.0	26.7	13.3	14.3
25	39.0	34.0	40.0	27.0	13.0	14.0
28	42.0	37.0	43.0	30.0	12.5	13.5
30	44.0	39.0	45.0	30.5	12.0	13.0
32	46.0	42.0	48.0	30.5	12.0	13.0
33	47.0	42.0	48.0	30.5	12.0	13.0
35	49.0	44.0	50.0	30.5	12.0	13.0
38	54.0	49.0	56.0	32.0	13.0	13.0
40	56.0	51.0	58.0	32.0	13.0	14.0
43	59.0	54.0	61.0	32.0	13.0	14.0
45	61.0	56.0	63.0	32.0	13.0	14.0
48	64.0	59.0	66.0	32.0	13.0	14.0
50	66.0	62.0	70.0	34.0	13.5	14.0
53	69.0	65.0	73.0	34.0	13.5	14.5
55	71.0	67.0	75.0	34.0	13.5	14.5
58	78.0	70.0	78.0	39.0	13.5	14.5
60	80.0	72.0	80.0	39.0	13.5	14.2
63	83.0	75.0	83.0	39.0	13.5	14.2
65	85.0	77.0	85.0	39.0	15.0	14.2
68	88.0	81.0	90.0	39.0	18.0	14.2
70	89.0	83.0	92.0	45.5	18.0	15.2
75	96.0	88.0	97.0	45.5	18.0	15.2
80	104.0	95.0	105.0	45.0	18.2	15.7
85	108.0	100.0	110.0	45.0	15.0	15.7
90	114.0	105.0	115.0	50.0	15.0	15.7
95	118.0	110.0	120.0	50.0	15.0	15.7
100	124.0	115.0	125.0	50.0	15.0	15.7

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279

Mobile : 095-249-3598

Fax : 02-014-0754