

TD-560

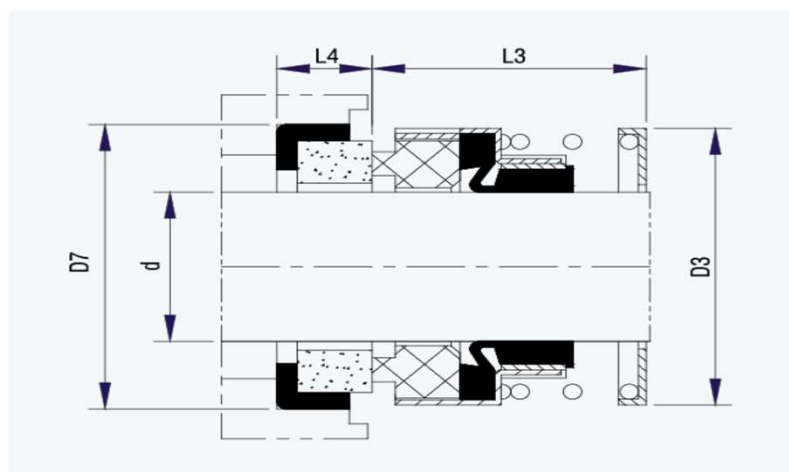
TENDEN
Mechanical Seal

Operation

Temperature : -20 °C - 150 °C
 Perssure : 10 bar
 Velocity : 10 m/s
 Medium : water ,oil,Weak corrosive mediums

Materials

Rotary Ring : Carbon/Sic
 Stationary Ring : Ceramic/ Sic
 Secondary Seals : NBR / EPDM / VITON
 Spring and Metal : SS304 / SS316
 Size : 10 mm - 70mm.

**TD-560**

SIZE	D3	D7	L3	L4
8	18.20	21	11.2	7
9	18.20	24	16.2	7
10	23.50	24	16.2	7
11	23.50	24	16.2	7
12	26.00	26	17.2	7
13	21.80	26	17.2	7
14	28.00	28	18.2	7
15	30.00	28	18.2	7
16	32.00	32	19.2	8
17	29.50	32	19.2	8
18	32.50	35	19.2	8
19	32.50	35	19.2	8
20	35.50	38	20.2	8
22	37.50	40	20.2	8
25	42.00	44	20.2	9
28	45.50	46	31.2	9
30	48.00	50	22.2	9
32	50.00	54	24.2	9
35	54.50	58	26.2	10
38	58.50	60	27.2	10
40	62.50	64	28.2	10
45	66.50	66	30.2	10
50	72.50	72	32.2	10

SIZE	D	D3	D7	L3	L4
0.375"	9.5	23.5	22.22	22.2	6.4
0.500"	12.7	26.0	25.40	22.2	6.4
0.625"	15.8	30.0	31.75	23.8	8.7
0.720"	19.0	32.5	34.92	23.8	8.7
0.875"	22.2	37.5	38.10	25.4	8.7
1.000"	25.4	44.0	41.27	27.0	9.5
1.125"	28.5	48.0	44.45	28.6	9.5
1.250"	31.7	50.0	47.62	28.6	9.5
1.375"	34.9	54.5	50.80	30.2	9.5
1.500"	38.1	58.5	53.97	30.2	9.5
1.625"	41.2	64.0	60.32	36.5	11.1
1.750"	44.4	67.0	63.50	36.5	11.1
1.875"	47.6	71.0	66.67	39.7	11.1
2.000"	50.8	73.5	69.85	39.7	11.1

Tel : 02-054-1279

T.D.Parts & Service Co.,Ltd.

Mobile : 095-249-3598

Fax : 02-014-0754