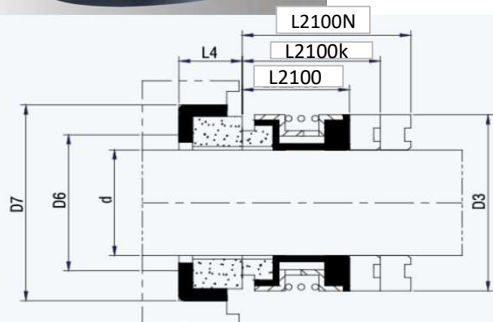


TD-2100**Operation**

Temperature : - 40 °C - 150 °C
 Pressure : 12 bar
 Velocity : 13 m/S
 Medium : water,oil,weak corrosive,
 weak acid mediums

TENDEN
Mechanical Seal

**Materials**

Rotary Ring : Carbon / Sic / TC
 Stationary Ring : Ceramic / Sic /TC /Carbon
 Secondary Seals : NBR / EPDM / VITON
 Spring and Metal : SS304 / SS316
 Size : 10 mm -100 mm.

TD-2100

SIZE/METRIC	D3	D6	D7	L4	TD-2100	TD-2100K	TD-2100N
					L3	L31	L32
10	20	15	21	5.0	15.0	27.5	35.0
12	22	17	23	6.0	15.0	26.5	34.0
14	24	19	25	6.0	15.0	29.0	34.0
15	25	20	26	6.0	15.0	29.0	34.0
16	26	23	27	6.0	15.0	29.0	34.0
18	32	25	33	6.0	20.0	31.5	39.0
20	34	27	35	6.0	20.0	31.5	39.0
22	36	29	37	6.0	20.0	31.5	39.0
24	38	31	39	6.0	20.0	34.0	44.0
25	39	32	40	6.0	20.0	34.0	44.0
28	42	35	43	6.0	26.0	36.5	44.0
30	44	37	45	7.0	26.0	35.5	43.0
32	46	40	48	7.0	26.0	35.5	48.0
33	47	40	48	7.0	26.0	35.5	48.0
35	49	42	50	8.0	26.0	34.5	47.0
38	54	47	56	8.0	30.0	37.0	47.0
40	56	49	58	8.0	30.0	37.0	47.0
43	59	52	61	8.0	30.0	37.0	52.0
45	61	54	63	8.0	30.0	37.0	52.0
48	64	57	66	10.0	30.0	35.0	50.0
50	66	60	70	10.0	30.0	37.5	50.0
53	69	63	73	10.0	30.0	37.5	60.0
55	71	65	75	10.0	30.0	37.5	60.0
58	78	68	78	10.0	33.0	42.5	60.0
60	80	70	80	12.0	33.0	40.5	58.0
63	83	73	83	12.0	33.0	40.5	58.0
65	85	75	85	12.0	33.0	40.5	68.0
68	88	79	90	12.0	33.0	40.5	68.0
70	90	81	92	12.0	33.0	48.0	68.0
75	99	86	97	12.0	40.0	48.0	68.0
80	104	92	105	14.0	40.0	47.5	77.5
85	109	97	110	14.0	40.0	47.5	77.5
90	114	102	115	14.0	40.0	52.5	77.5
95	119	117	120	14.0	40.0	52.5	77.5
100	124	122	125	14.0	40.0	52.5	77.5

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279
 Mobile : 095-249-3598
 Fax : 02-014-0754