

TD-M3N

TENDEN

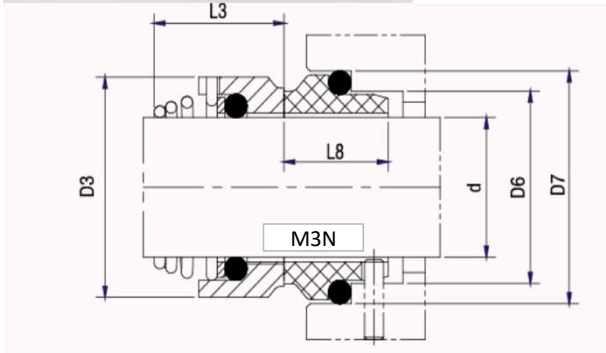
Mechanical Seal

Operation

Temperature : -30°-220°C
 Pressure : 16 bar
 Velocity : 20 m/S
 Medium : Water ,Oil, waek acid
 weak alkali

Meaterials

Rotary Ring : Carbon / Sic / TC
 Statomaru Ring : Ceramic / Sic / TC
 Secondary Seals : NBR / EPDM / VTION
 Spring and Metal : SS304 / SS316
 Size : 10 mm - mm.

**TD-M3N**

SIZE/METRIC	D3	D13	D6	D7	L4	L8	L3
10	19	20	17	21	10.0	17.5	15.5
12	21	22	19	23	10.0	17.5	16.0
14	23	24	21	25	10.0	17.5	16.5
16	26	26	23	27	10.0	17.5	18.0
18	29	31	27	33	11.5	19.5	19.5
20	31	34	29	35	11.5	19.5	22.0
22	33	36	31	37	11.5	19.5	21.5
24	35	38	33	39	11.5	19.5	23.5
25	36	39	34	40	11.5	19.5	26.5
28	40	42	37	43	11.5	19.5	26.5
30	43	44	39	45	11.5	19.5	26.5
32	46	46	42	48	11.5	19.5	26.5
33	47	47	42	48	11.5	19.5	28.5
35	49	49	44	50	11.5	19.5	28.5
38	53	54	49	56	14.0	22.0	28.5
40	56	56	51	58	14.0	22.0	33.5
43	59	59	54	61	14.0	22.0	36.0
45	61	61	56	63	14.0	22.0	38.5
48	64	64	59	66	14.0	22.0	39.5
50	66	66	62	70	15.0	22.0	46.0
53	69	69	65	73	15.0	23.0	45.0
55	71	71	67	75	15.0	23.0	47.0
58	76	78	70	78	15.0	23.0	49.0
60	78	79	72	80	15.0	23.0	55.0
63	83	83	75	83	15.0	23.0	55.0
65	84	85	77	85	15.0	23.0	55.0
68	88	88	81	90	18.0	26.0	55.0
70	90	90	83	92	18.0	26.0	57.0
75	98	98	88	97	18.0	26.0	62.0
80	100	103	95	105	18.2	26.2	61.8

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279
 Mobile : 095-249-3598
 Fax : 02-014-0754