

TD-M4N

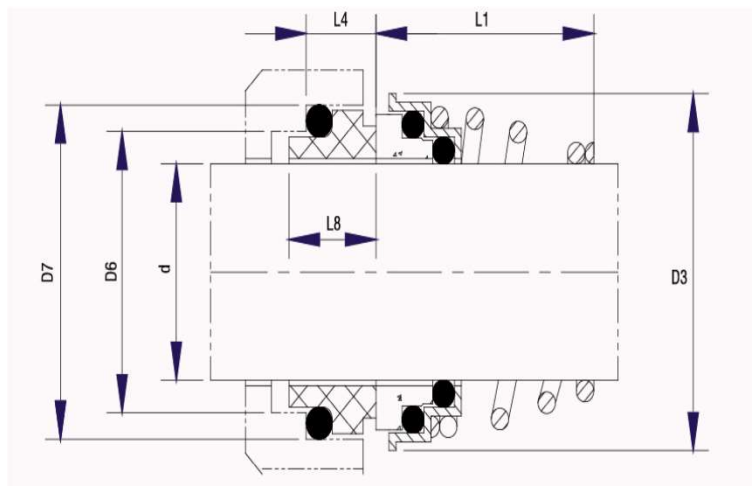
TENDEN
Mechanical Seal

Operation

Temperature : -20°C - 200°C
 Pressure : 7 bar
 Velocity : 10 m/s
 Medium : Water pumps, Circulate pumps

Materials

Rotary Ring : Carbon / Sic / TC
 Statinary Ring : Ceramic / Sic / TC
 Secondary Seals : NBR / EPDM / VITON
 Spring and Metal : SS304 / SS316
 Size : 10 mm - 40 mm.


TD-M4N
SIZE/METRIC

D	D3	L1	D6	D7	L4	L8
10	20	15	14.0	18.1	5.5	7.0
11	22	18	16.5	20.6	5.5	7.0
12	22	18	16.5	20.6	5.5	7.0
13	25	22	19.0	23.1	6.0	7.5
14	25	22	19.0	23.1	6.0	7.5
15	29	22	21.0	26.9	7.0	9.2
16	29	23	21.0	26.9	7.0	9.2
17	29	23	21.0	26.9	7.0	9.2
18	33	24	25.0	30.9	8.0	10.0
19	33	25	25.0	30.9	8.0	10.0
20	33	25	25.0	30.9	8.0	10.0
21	38	25	30.0	35.4	8.0	10.0
22	38	25	30.0	35.4	8.0	10.0
23	38	27	30.0	35.4	8.0	10.0
24	38	27	30.0	35.4	8.0	10.0
25	40	27	33.0	38.2	8.0	9.5
28	46	29	38.0	43.3	9.0	11.0
29	46	30	38.0	43.3	9.0	11.0
30	46	30	38.0	43.3	9.0	11.0
32	46	30	38.0	43.3	9.0	11.0
33	48	39	45.0	53.5	11.5	13.0
35	50	39	45.0	53.5	11.5	13.0
38	56	39	52.0	60.5	11.5	13.0
40	58	39	52.0	60.5	11.5	13.0

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279
 Mobile : 095-249-3598
 Fax : 02-014-0754