

TD-M7N




TENDEN
Mechanical Seal

Operation

Temperature : -20°C-220°C
pressure : 15 bar
Velocity : 18 m/s
Medium : Water oil, acid, alkali, etc.

Materials

Rotary Ring : Carbon/ Sic /TC/Sus
Stationary Ring : Ceramic / Sic TC
Secondary Seals : NBR / EPDM / VITON
Spring and Metal : SS304 / SS316
Size : 14 mm - 100 mm.

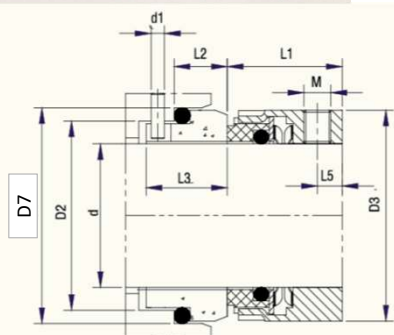

TD-M7N

SIZE/METRIC	D3	D2	D7	D1	L1	L2	L3	L5	M
D									
14	25	21	25	3	25.0	10.0	17.5	6	M5
16	27	23	27	3	25.0	10.0	17.5	6	M5
18	33	27	33	3	26.0	11.5	19.5	7	M5
20	35	29	35	3	26.0	11.5	19.5	7	M5
22	37	31	37	3	26.0	11.5	19.5	7	M5
24	39	33	39	3	28.5	11.5	19.5	8	M5
25	40	34	40	3	28.5	11.5	19.5	8	M5
28	43	37	43	3	31.0	11.5	19.5	8	M6
30	45	39	45	3	31.0	11.5	19.5	8	M6
32	47	42	48	3	31.0	11.5	19.5	8	M6
33	48	42	48	3	31.0	11.5	19.5	8	M6
35	50	44	50	3	31.0	11.5	19.5	8	M6
38	55	49	56	4	31.0	14.0	22.0	8	M6
40	57	51	58	4	31.0	14.0	22.0	8	M6
43	60	54	61	4	31.0	14.0	22.0	8	M6
45	62	56	63	4	31.0	14.0	22.0	8	M6
48	65	59	66	4	31.0	14.0	22.0	8	M6
50	67	62	70	4	32.5	15.0	23.0	8	M6
53	70	65	73	4	32.5	15.0	23.0	8	M6
55	72	67	75	4	32.5	15.0	23.0	8	M6
58	79	70	78	4	37.5	15.0	23.0	9	M8
60	81	72	80	4	37.5	15.0	23.0	9	M8
63	84	75	83	4	37.5	15.0	23.0	9	M8
65	86	77	85	4	37.5	15.0	23.0	9	M8
68	89	81	90	4	34.5	18.0	26.0	9	M8
70	91	83	92	4	42.0	18.0	26.0	9	M8
75	99	88	97	4	42.0	18.0	26.0	10	M8
80	104	95	105	4	41.8	18.2	26.2	10	M8
85	109	100	110	4	41.8	18.2	26.2	10	M8
90	114	105	115	4	46.8	18.2	26.2	10	M8
95	119	110	120	4	47.8	17.2	25.2	10	M8
100	124	115	125	4	47.8	17.2	25.2	10	M8

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279
Mobile : 095-249-3598
Fax : 02-014-0754