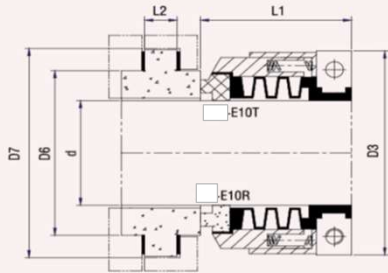


TD-T10

TENDEN
Mechanical Seal

Operation

Temperature : -120°C
 Pressure : 5 bar
 Velocity : 10 m/S
 Medium : All kinds of acids

Materials

Rotary Ring : PTFE / SIC
 Statinary Ring : Ceramic / Sic
 Secondary Seals : PTFE
 Spring and Metal : SS304 / SS316
 Size : 14 mm - 100 mm.

TD-T10	D3	D6	D7	L1	L2
SIZE/METRIC					
16	54	36.51	48.00	31	8.0
18	54	36.51	48.00	31	8.0
20	57	39.69	51.00	31	8.0
22	57	39.69	51.00	31	8.0
24	61	42.86	54.00	33	8.0
25	61	42.86	54.00	33	8.0
28	67	50.80	65.00	36	11.0
30	70	53.98	68.00	37	11.0
32	70	53.98	68.00	37	11.0
33	73	57.15	71.00	38	11.0
35	73	57.15	71.00	38	11.0
38	76	63.50	78.00	38	11.0
40	80	66.68	81.00	40	11.0
43	83	69.85	84.00	40	11.0
45	83	69.85	84.00	40	11.0
48	89	79.38	97.00	43	14.3
50	89	79.38	97.00	43	14.3
53	103	82.55	100.00	53	14.3
55	107	85.73	103.00	53	14.3
58	110	88.90	106.00	53	14.3
60	110	88.90	106.00	53	14.3
63	113	92.08	110.00	53	14.3
65	116	95.25	113.00	53	14.3
68	118	98.43	116.00	53	14.3
70	118	98.43	116.00	53	14.3
75	126	103.19	121.00	53	14.3
80	150	114.30	132.00	73	14.3
85	156	120.65	138.00	73	14.3
90	163	127.00	144.00	73	14.3
95	163	127.00	144.00	73	14.3
100	169	133.35	151.00	73	14.3

SIZE/NICH	D3	D6	D7	L1	L2
0.750	54	36.51	48	31	8.0
0.875	57	39.69	51	31	8.0
1.000	61	42.86	54	33	8.0
1.125	67	50.80	65	36	11.0
1.250	70	83.98	68	37	11.0
1.375	73	57.15	71	38	11.0
1.500	76	63.50	78	38	11.0
1.625	80	66.68	81	40	11.0
1.750	83	69.85	84	40	11.0
1.875	86	73.03	87	43	11.0
2.000	89	79.38	97	43	14.3
2.125	103	82.55	100	53	14.3
2.250	107	85.73	103	53	14.3
2.375	110	88.90	106	53	14.3
2.500	113	92.08	110	53	14.3
2.625	116	95.25	113	53	14.3
2.750	118	98.43	116	53	14.3
2.875	122	100.01	117	53	14.3
3.000	126	103.19	121	53	14.3
3.250	150	114.30	132	73	14.3
3.500	156	120.65	138	73	14.3
3.750	163	127.00	144	73	14.3
4.000	169	133.35	151	73	14.3