

TD-T85L

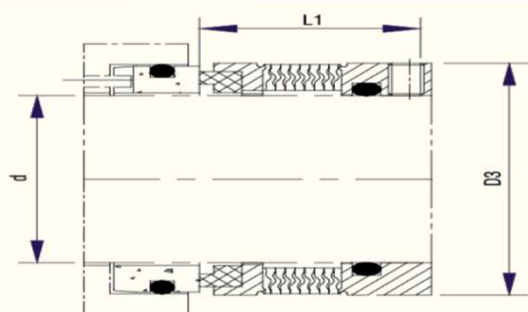

TENDEN
Mechanical Seal

Operation

Temperature : -20°C - 200°C
 Pressure : 20 bar
 Velocity : 23 m/S
 Medium : Oil, light hydrocarbon, Aromatic hydrocarbon organic, Solvents, weak acid, alkali, Ammonia, etc.

Materials

Rotary Ring : Carbon / Sic / TC
 Statinary Ring : Sic / TC
 Secondary Seals : NBR / EPDM / VITON
 Spring and Metal : SS304 / SS316
 Size : 14 mm - 100mm.


TD-T85L

SIZE/METRIC	D3	L1	D7
D1			
18	32.0	27.5	33
20	33.3	27.5	35
22	36.0	27.5	37
24	38.1	30.0	39
25	39.0	30.0	40
28	42.0	32.5	43
30	44.0	32.5	45
32	46.0	32.5	48
33	47.0	32.5	48
35	49.2	32.5	50
38	52.4	34.0	56
40	55.6	34.0	58
43	58.7	34.0	61
45	58.7	34.0	63
48	61.9	34.0	66
50	65.1	34.5	70
53	68.3	34.5	73
55	71.0	34.5	75
60	74.6	39.5	80
65	84.1	39.5	85
70	87.3	45.0	92
75	95.3	45.0	97
80	98.4	44.5	105
85	104.8	44.5	110
90	108.0	49.5	115
95	114.3	49.5	120
100	120.7	49.5	125

SIZE/INCH	D	D3	L1
0.750	19.05	33.32	31.75
0.875	22.23	36.50	31.75
0.937	23.80	38.10	31.75
1.000	25.40	39.67	31.75
1.125	28.58	42.85	31.75
1.250	31.75	46.02	33.32
1.375	34.93	49.20	36.50
1.500	38.10	52.37	36.50
1.625	41.28	55.55	36.50
1.750	44.45	58.72	36.50
1.875	47.63	61.90	38.10
2.000	50.80	65.07	38.10
2.125	53.98	68.25	38.10
2.250	57.15	71.42	39.67
2.375	60.33	74.60	39.67
2.500	63.50	80.95	39.67
2.625	66.68	84.12	41.28
2.750	69.85	87.30	41.28
2.875	73.03	92.08	42.85
3.000	76.20	95.25	42.85
3.125	79.38	98.43	44.45
3.250	82.55	101.60	44.45
3.375	85.73	104.78	44.45
3.500	88.90	107.95	47.63
3.625	92.08	111.13	47.63
3.750	95.25	114.30	47.63
3.875	98.44	117.48	47.63
4.000	101.60	120.65	47.63

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279
 Mobile : 095-249-3598
 Fax : 02-014-0754