

TD-050

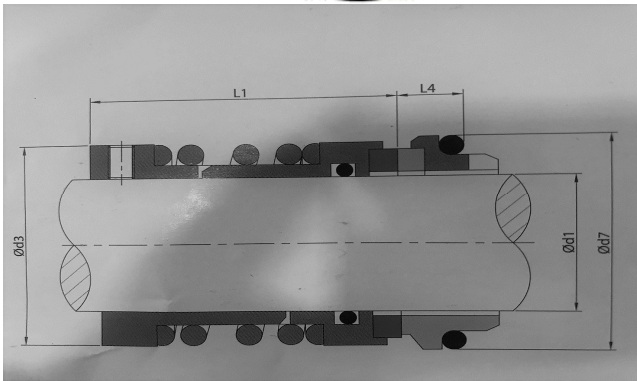
TENDEN
Mechanical Seal

Operation

Temperature : 20°C - 180°C
 Pressure : 16 bar
 Velocity : 16m/S
 Medium : Water, oil, weak acid, weak alkali, ect

Materials

Rotary Ring : Carbon / Sic / TC
 Statinary Ring : Ceramic / Sic /TC / Carbon
 Secondary Seals : NBR / EPDM / VITON
 Spring and Metal : SS304 / SS316
 Size :

**TD-050**

D1	D3	D7	L1	L4
18	32	33	40.0	11.5
20	34	35	40.0	11.5
22	36	37	41.0	11.5
24	38	39	44.0	11.5
25	39	40	44.0	11.5
28	42	43	44.5	11.5
30	44	45	45.0	11.5
32	46	48	46.5	11.5
33	47	48	46.5	11.5
35	49	50	46.5	11.5
38	54	56	49.0	14.0
40	56	58	49.0	14.0
43	59	61	52.0	14.0
45	61	63	52.0	14.0
48	64	66	53.0	14.0
50	66	70	54.0	15.0
53	69	73	58.5	15.0
55	71	75	60.5	15.0
58	78	78	63.5	15.0
60	80	80	63.5	15.0
63	83	83	65.5	15.0
65	85	85	68.5	15.0
68	88	90	68.5	18.0
70	90	92	72.5	18.0
75	99	97	73.0	18.0
80	104	105	76.5	18.2
85	109	110	76.5	18.2
90	114	115	78.5	18.2
95	119	120	79.2	17.2
100	124	125	79.5	17.2

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279
 Mobile : 095-249-3598
 Fax : 02-014-0754