

**TD-FTK**

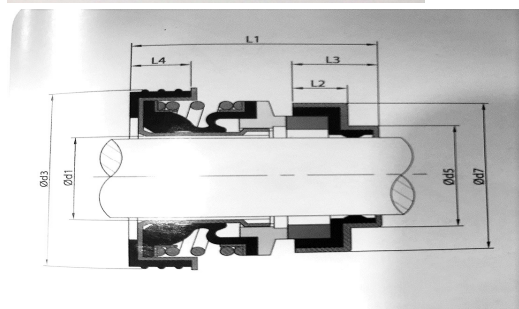
**TENDEN**  
Mechanical Seal

**Operation**

Temperature : -30°C - 200°C  
 Pressure : 6 bar  
 Velocity : 10m/sec  
 Medium : water,oil, weak corrosive mediums

**Materials**

Rotary Ring : Carbon / Sic / TC  
 Statinary Ring : CE / SIC / TC  
 Secondary Seals : NBR / EPDM / VITON  
 Spring and Metal : SS304 / SS316  
 Size :

**TD-FTK**

| D1   | D3 | D5   | D7 | L1   | L2  | L3 | L4   |
|------|----|------|----|------|-----|----|------|
| 18.2 | 41 | 23.0 | 33 | 26.5 | 5.0 | 10 | 9.5  |
| 21.2 | 45 | 27.0 | 38 | 29.0 | 5.0 | 10 | 11.4 |
| 26.4 | 52 | 30.5 | 47 | 34.5 | 8.5 | 13 | 11.5 |
| 41.2 | 75 | 50.5 | 65 | 48.6 | 8.5 | 21 | 15.6 |

**T.D.Parts & Service Co.,Ltd.**

Tel : 02-054-1279  
 Mobile : 095-249-3598  
 Fax : 02-014-0754