

TD-301

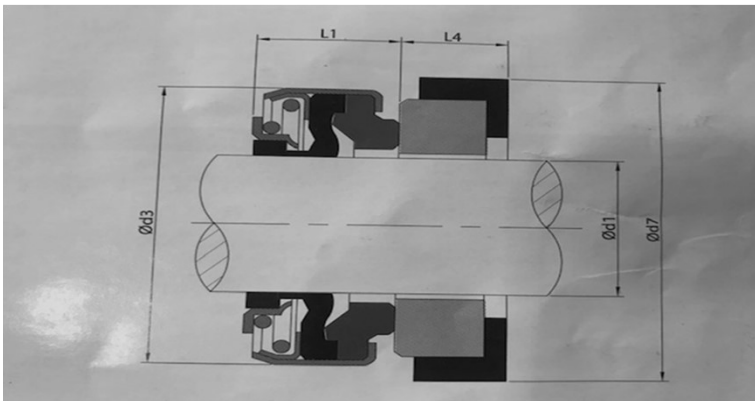
TENDEN
Mechanical Seal

Operation

Temperature -20°C - 100°C
 Pressure 5 bar
 Velocity 10 m/S
 Medium water,oil

Materials

Rotary Ring Carbon / Sic / TC
 Stationary Ring Ceramic / Sic / TC
 Secondary Seals NBR / EPDM / VITON
 Spring and Metal SS304 / SS316

**TD-301**

D1	D3	D7	L1	L4
6	18	18.0	10.0	4.0
8S	18	22.0	11.0	4.0
8M	20	26.0	9.5	5.5
8L	24	26.0	9.5	5.5
10	24	26.0	13.0	8.0
11	24	26.0	13.0	8.0
12	24	26.0	13.0	8.0
13	24	26.0	11.5	8.0
13L	28	28.0	13.0	8.0
13H	32	29.5	22.5	8.0
14	28	28.5	13.0	8.0
14L	32	29.5	13.0	8.0
15	28	30.0	13.0	8.0
15	32	29.5	13.0	8.0
15L	39	38.0	13.0	8.0
16	28	30.0	13.0	8.0
16	32	29.5	13.0	8.0
16	39	38.0	13.0	8.0
16	32	30.0	11.0	10.0
17	39	42.0	13.0	8.0
18	39	42.0	13.0	8.0

D1	D3	D7	L1	L4
19.0	39	42	13.0	8.0
20.0	39	42	13.0	8.0
20.0	42	45	13.0	10.0
22.0	36	45	16.5	10.0
22L	42	45	13.0	10.0
23.0	47	50	13.5	10.0
24.0	47	50	13.5	10.0
25.0	42	50	13.5	10.0
25L	47	50	13.5	10.0
26.0	47	50	13.5	10.0
27.0	47	50	13.5	10.0
28.0	54	57	15.0	10.0
30.0	54	57	15.0	10.0
32.0	54	57	15.0	10.0
35.0	60	63	16.0	10.0
38.0	65	68	18.0	12.0
40.0	65	68	18.0	12.0
45.0	70	73	20.0	12.0
50.0	85	88	23.0	15.0
55.0	85	88	23.0	15.0
60.0	105	110	30.0	15.0

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279
 Mobile : 095-249-3598
 Fax : 02-014-0754