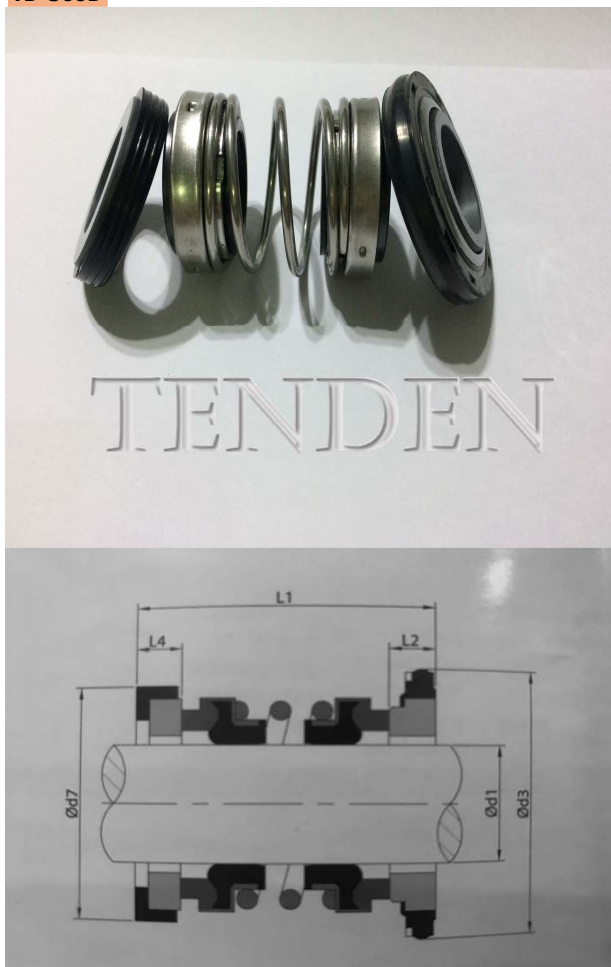


TD-560D

TENDEN
Mechanical Seal

Operation

Temperature : -20°C - 100°C
 Pressure : 5 bar Linear Velocity : 8m/S
 Pumps : Submersible pumps, sewage pumps;
 applied to the muddy water,
 sewage water or weak corrosive
 uid with solid grains

Materials

Rotary Ring : Carbon / Sic / TC
 Station Ring : Ceramic / Sic / TC
 Secondary Seals : NBR / EPDM / VITON
 Spring and Metal : SS304 / SS316
 Size : 13 mm - 50 mm.

TD-560D

D1	D7	D3	L1	L2	L4
13	25	25	36	5	5
14	30	30	37	5	5
15	30	30	37	5	5
16	30	30	37	5	5
18	35	38	49	7	5
19	35	38	49	7	5
20	38	44	49	7	7
25	44	50	51	7	7
30	50	57	59	9	8
35	58	64	61	9	9
40	64	70	64	11	9
45	66	70	65	10	9
50	72	80	69	10	9

T.D.Parts & Service Co.,Ltd.

Tel : 02-054-1279

Mobile : 095-249- 3598

Fax : 02-014-0754